

Push Button Lock removed



Unscrew Knob



Pry up nylon plate with flat screwdriver






Remove nylon slide at rear




Note one spring leg is missing from nylon slide. Split ring spread to act as spring will act as replacement spring.



Insert split ring behind slide. Widest part of split ring is shown here to the top for illustration only, works best if the widest part is at the bottom.

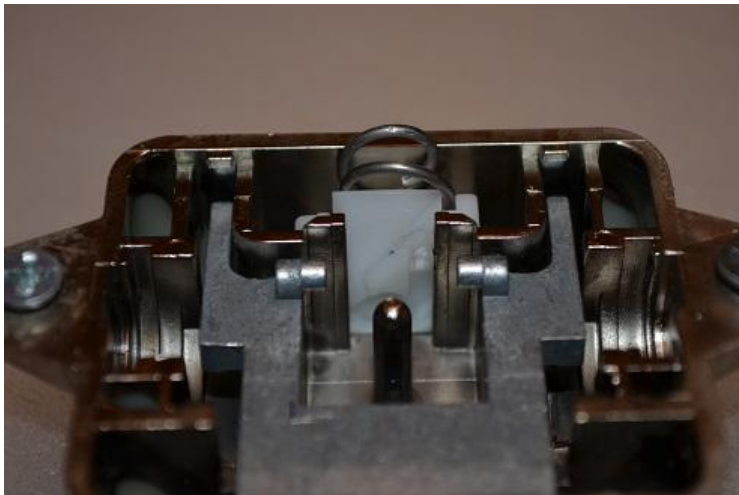

Reassemble by snapping the nylon plate back behind the tabs.

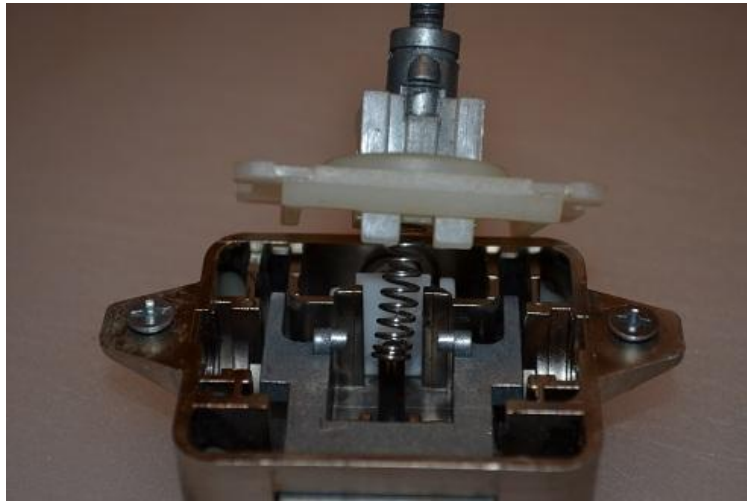

You may have to work it back and forth a little to make sure everything is seated properly. I have several fixes like this on the boat that have worked for years.